



AFM/WM[®] Waterproofing Membrane

Peel and Stick Waterproof System for Tile

AFM-WM is a 40 mil peel-and-stick crack isolation sheet waterproofing membrane for use beneath thin-set tile and stone applications. It is suitable as an interior anti fracture membrane and for waterproofing installations.

AFM-WM incorporates a 2" overlap guide on one side of the sheet for waterproofing. The 2" flood coated lap allows for a cohesive bond between subsequent sheets of membrane. Once the cohesive bond occurs, AFM-WM turns into a monolithic or single-ply membrane across the entire surface being waterproofed.

PROPERTIES AFM/WM

Adhesive	Rubberized Adhesive
Applications	Residential & Commercial
Thickness	40 mil (1 mm)
Elongation (ASTM D412), %	500 min (rubberized adhesive only)
ASTM D4068	Rated for Shower Pan Liners
Application Temp	45°F - 120°F (7°C - 49°C)
Service Temp	-20°F - 180°F (-29°C - 82°C)
UV exposure	30 Days
Color	Grey
Warranty	10 Year Limited Warranty

DESCRIPTION

For use under thin-set tile and dimensional stone installations as an interior anti fracture and waterproofing membrane.

APPROVED SUBSTRATES/FOR USE OVER

- Exterior glue plywood
- Concrete
- Cement terrazzo
- Gypcrete
- Radiant heated subfloors
- Portland based leveling and patching compounds
- Mortar beds
- Cement backer board
- Ceramic tile & dimensional stone
- Stained Concrete
- Metal

AVAILABLE SIZES

- 36" x 75' Roll


TYPICAL APPLICATIONS

All interior wet areas including showers, kitchens & flooring:


- Commercial
- Multi-family
- Healthcare
- Educational
- Residential
- Hospitality
- Municipal
- Government

ACCESSORIES

- PW 6000 Primer
- Protecto Universal Water Based Primer™
- JS Mastic & 500 Detail Tape
- Proteco LM Liquid & Fabric Based Primer™

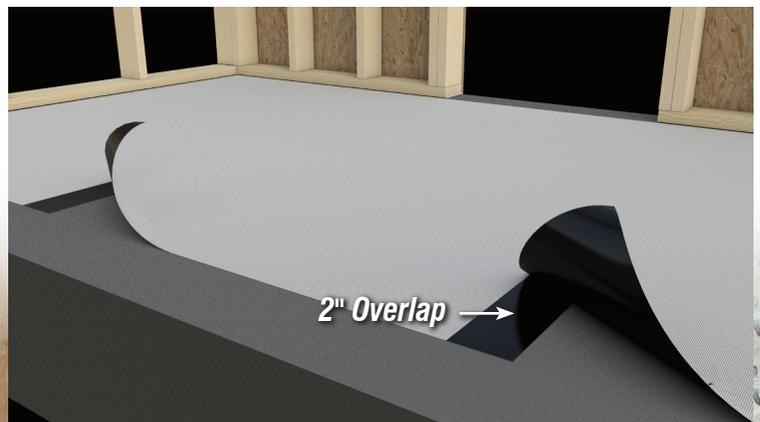

COMMERCIAL

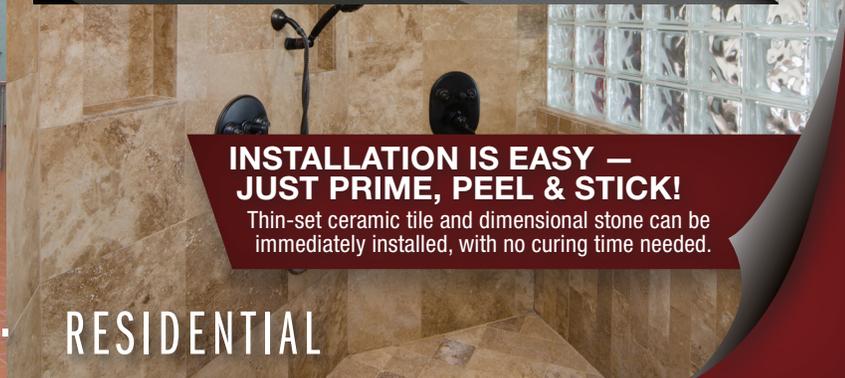

RESIDENTIAL

INSTALLATION IS EASY — JUST PRIME, PEEL & STICK!

Thin-set ceramic tile and dimensional stone can be immediately installed, with no curing time needed.



AFM/WM[®] Waterproofing Membrane Peel and Stick Waterproof System for Tile

HEAVY DUTY ROBINSON RATING

Suitable for Use


All interior wet areas including:

- Kitchens
- Bathrooms
- Shower Pan Liners and Walls

INSTALLATION & FLOOD TEST

See product data sheet for detailed installation information and flood test requirements at www.protectowrap.com.

INSTALLATION METHOD 1 - USING TAPE & MASTIC

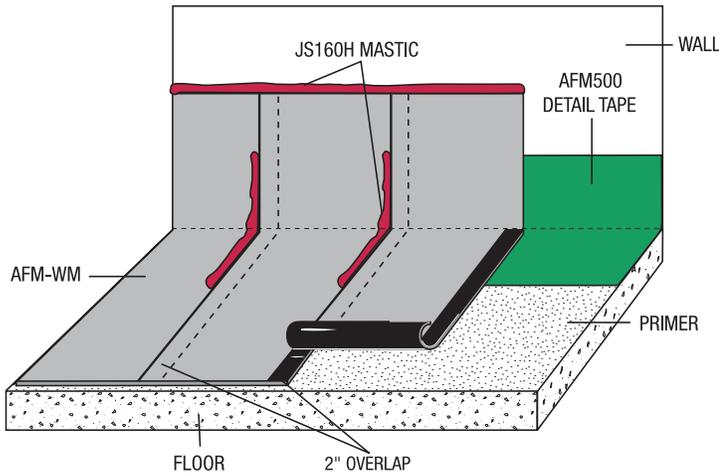


ACCESSORY MATERIALS



PW 6000 Primer



Protecto Universal
Water Based Primer

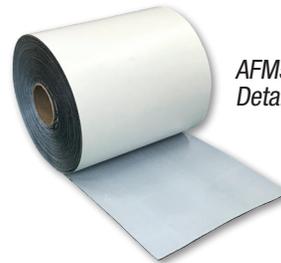


AFM500
Detail Tape



JS 160H Mastic

INSTALLATION METHOD 2 - USING PROTECTO LM

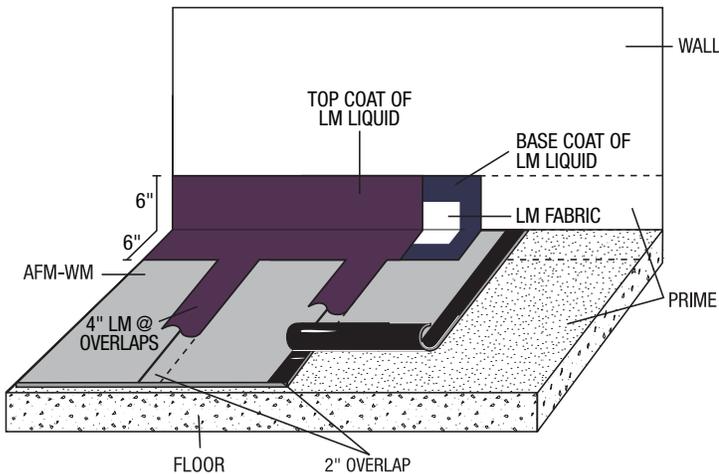

Protecto LM
Liquid Membrane



Protecto LM
Reinforcing Fabric

Protecto Wrap is a proud member of the following trade organizations:



LIMITATIONS See data sheet at www.protectowrap.com.



1955 South Cherokee Street
Denver, CO 80223
(800) 759-9727
www.ProtectoWrap.com
AWM-200 (5-20)