




Protecto **PREMIUM ENERGY** **SILL SEALER®**

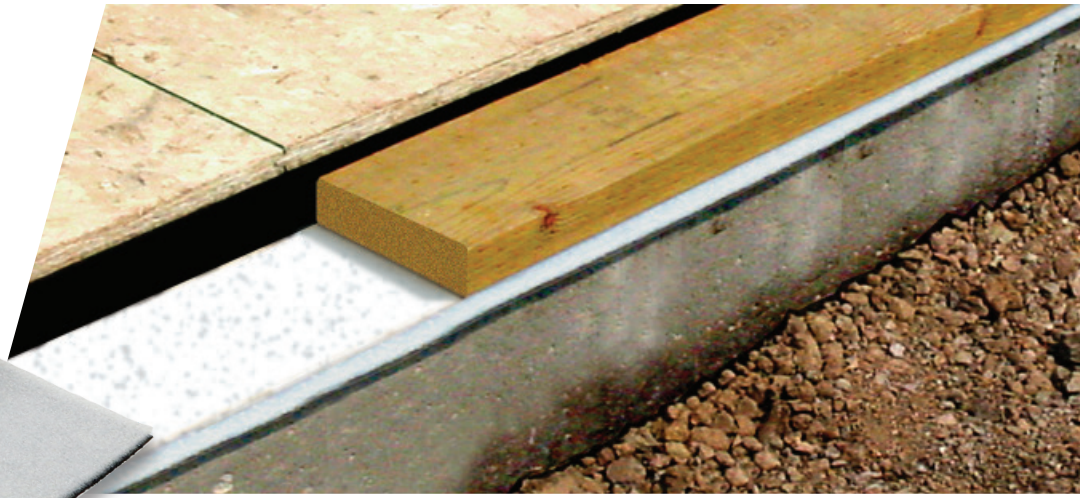

**10 Year Limited
Warranty**

- A full width self-adhering membrane with a 3/8" foam layer that is 50% thicker than ordinary loose laid sill sealers
- Forms a tight gasket on both vertical and horizontal surfaces
- Increases energy-efficiency and keeps insects and rodents out of the building
- Thick foam layer conforms to irregular surfaces at the sill to prevent air infiltration over the life of the structure - allows for movement and shrinkage of plate over time
- Helps pass the blower door test
- Self adhering allows for product to stay in place even in windy conditions and allows for vertical application without fasteners
- Exceeds building codes
- Will not rot or deteriorate with age
- Adheres to concrete, wood and metal framing



Protecto PREMIUM ENERGY SILL SEALER®

APPLICATION:

Areas to be sealed must be clean and dry. Knock off and remove any rough or jagged edges. Protecto Premium Energy Sill Sealer should be placed flush with the outside perimeter of the foundation. Peel off the paper release backing and begin rolling or pressing the adhesive bottom onto the top of the foundation wall.

Use Universal Water Based Primer on ICF

Should you have re-bar or anchor bolts coming out of the foundation, simply make an "X" cut in the back of Protecto Premium Energy Sill Sealer and slide over the protrusion pressing firmly in place. All butt joints should be taped with a 4" wide piece of Universal Primer Free Membrane or Protecto Super Stick Building Tape®.

INSTALLATION BELOW 40°:

- Keep Protecto Energy Sill Sealer in a warm heated space above 50°F before use.
- Prime the top of the foundation with #100 Primer* and allow primer to tack up. Do not cover wet primer. Do not use #100 Primer on ICF.
- Peel and stick the Protecto Energy Sill Sealer in place.

**Note: Protecto Wrap Protecto-Tak 13 oz. spray adhesive may be used in place of #100 Primer.*

AVAILABLE SIZES

3 1/2", 5 1/2" x 25'

OTHER ENERGY SAVINGS PRODUCTS

PROTECTO DUAL GUARD THRESHOLD TAPE™



Its unique flange acts like a gasket, sealing off the sub-floor and preventing air and moisture infiltration under the threshold. Helps keep the door frame from racking and the sub-floor from swelling and warping.

PROTECTO TRIPLE GUARD ENERGY SILL SEALER®

A cold applied self-adhering membrane composed of a 3/8" closed cell foam gasket laminated with two peel and stick flaps that seal to the foundation and to the exterior framed wall assembly.



PROTECTO ENERGY PLATE LINER®



Designed specifically for conforming and sealing off air gaps between the floor deck and the exterior wall plates. The 1/4" closed cell foam forms a gasket seal beneath the exterior wall plate virtually eliminating any air drafts resulting in a large amount of HVAC energy savings.



Protecto Wrap Company
1955 S. Cherokee Street • Denver, CO 80223
(800) 759-9727 • www.ProtectoWrap.com

