



Premium Building Products  
That Protect

# PROTECTO SEALANT 25XL

## POLYURETHANE WINDOW & DOOR INSTALLATION SEALANT

### PRODUCT DESCRIPTION

Protecto Sealant 25XL is a high performance, low modulus, one-component, moisture curing, polyurethane sealant.

### PRODUCT USES

Protecto Sealant 25XL is a durable weatherproof sealant that offers excellent performance for back bedding nail flanges for window and door installation and sealing door thresholds. Protecto Sealant 25XL is recommended for use with the Protecto Sill Drainage System.

### FEATURES

- ◆ 100% compatible with Protecto Wrap window and door sealing tape
- ◆ Aggressive adhesion to most commonly used building substrates and window compositions
- ◆ Provides a strong, durable, weather resistant bond to most building substrates
- ◆ Mold and UV resistive
- ◆ Paintable
- ◆ Fast cure and solvent-free formulation
- ◆ Excellent long-term weather resistance
- ◆ Meets AAMA and ASTM sealant standards

### LIMITATIONS

Do not apply over wet, frozen or contaminated surfaces. Do not use alcohol or solvents for cleaning the substrate prior to application.

### STORAGE


**PROTECT FROM FREEZING.** Store between 40°F (4°C) and 120°F (49°C) in original unopened containers out of weather and direct sunlight. If material has frozen, it will turn into a semi-solid condition and/or smell bad and should not be used.

### PACKAGING & COLOR

1/12 gallon (10.1fl.oz./300 ml) cartridges, 30 cartridges per case  
Available in white

### APPLICATION

Protecto Sealant 25XL cartridges are easy to apply with conventional hand-caulking equipment. Apply a continuous 3/8" diameter sealant bead along the back of the nailing flanges along the pre-punched fastener holes and immediately set the window/door per manufacturers instructions. Allow Protecto Sealant 25XL to cure for 24 hours prior to covering with Protecto Wrap window and door sealing tape.

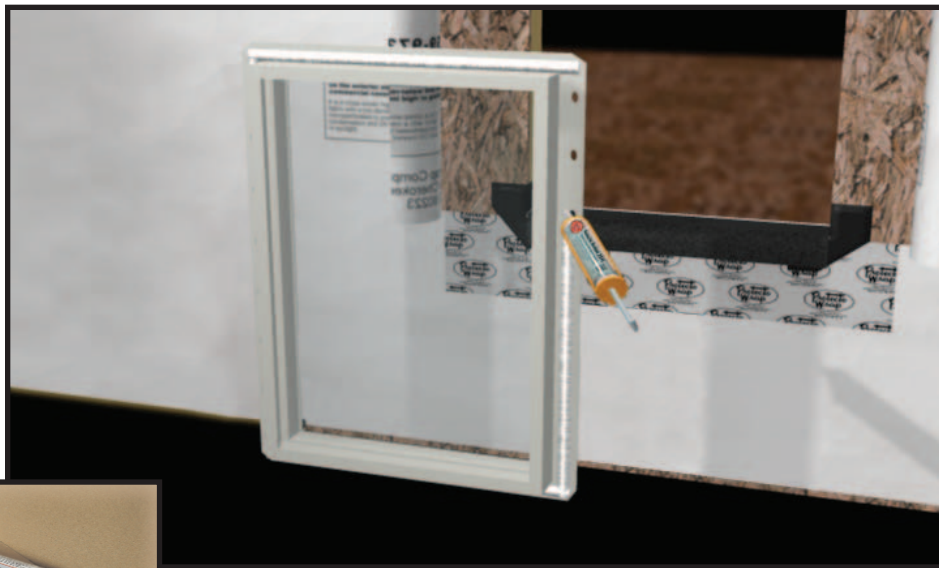

**PROTECTO WRAP COMPANY**

(800) 759-9727

[www.protectowrap.com](http://www.protectowrap.com)