



# Protecto PRE-LEDGER & LEDGER FLASHING TAPE™



Protecto Pre-Ledger and Ledger Flashing Tape is an easy to install self-adhering flashing that helps sustain the life of the ledger and structure by protecting both from moisture, rot and decay

PROTECTO PRE-LEDGER AND LEDGER FLASHING TAPE is a waterproof self-adhering flexible flashing tape for use behind the Ledger Board as Back Flashing to protect the building structure and to shingle over the Ledger Board as Top Flashing from behind the finished siding to direct moisture away from the structure and help sustain the life of the Ledger Board.

PROTECTO PRE-LEDGER AND LEDGER FLASHING TAPE is an aluminum reinforced, self-adhering tape used to flash the ledger board to the structure and is self-sealing around properly installed fasteners.

***Internally reinforced with a layer of aluminum***


## FEATURES & BENEFITS

SCAN TO FIND  
OUT MORE



- Helps protect the structure and sustain the life of the ledger board by preventing moisture related issues
- Self Sealing around properly installed fasteners
- 100% butyl adhesive flashing membrane
- 6" split release liner for easy, accurate installation
- AAMA 711 compliant, meets IRC § 507.3.5 for deck ledger connections
- Available in Ledger Tape: 12" x 25', 12" x 50' and Pre-Ledger Tape: 24" x 25' rolls
- All weather durability
- Black facer film blends between deck boards
- 10 Year Warranty

# Protecto PRE-LEDGER & LEDGER FLASHING TAPE™

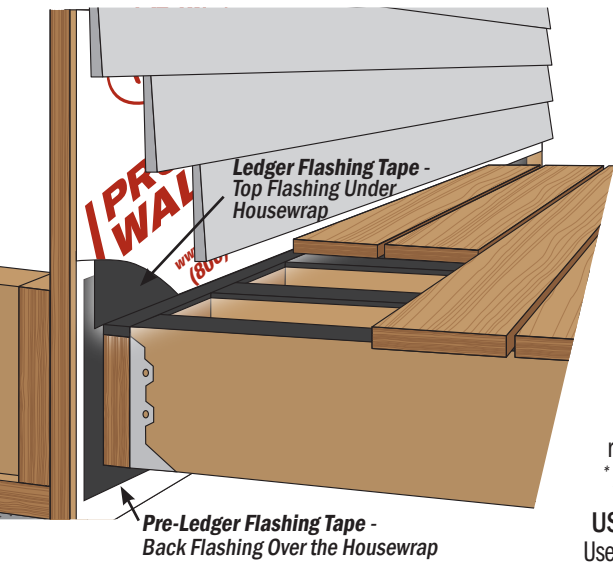

## APPLICATION:

Mark an area 4" above, below and on each side of where the Ledger Board is to be located. Apply Back Flashing of the **PRE-LEDGER FLASHING TAPE** to the sheathing within the marked area in a manner that the top side will be underneath the housewrap and the bottom side will be adhered over the housewrap in a shingling fashion. Roll firmly into position to assure good adhesion. Place the Ledger Board into position and fasten securely to the structure. Apply Top Flashing of the **LEDGER FLASHING TAPE** in a manner that will be under the housewrap and a minimum of 2" over the top of the Ledger Board. Roll firmly into place to assure good adhesion. Note: Any overlaps should be a minimum of 2". Primer is not typically required. If enhanced adhesion is needed, use Protecto Wrap Universal Primer or Protecto Tak Spray Primer. \*Additional methods and details can be found at [www.protectowrap.com](http://www.protectowrap.com) or call (800) 759-9727.

## USES:

Used as a Back Flashing Tape and Top Flashing Tape on Ledger Boards to help prevent moisture related issues and to help sustain the life of the Ledger Board. **PRE-LEDGER AND LEDGER FLASHING TAPE** is self-sealing around properly installed fasteners. For best practice use coated or stainless-steel fasteners.

## LIMITATIONS:

Not recommend to be applied over uncured (wet) sealants or adhesives, even if compatible. Please see Chemical Compatibility Tech Letter at [www.protectowrap.com](http://www.protectowrap.com). Not recommend for use over granulated surfaces. Not recommended for use on substrates with standing water, damp or dirty surfaces, frozen surfaces or surfaces contaminated with foreign substances such as grease, oil or solvents.

## SHELF LIFE:

**PRE-LEDGER AND LEDGER FLASHING TAPE** maintains optimum initial adhesion to substrates when used within one year from the date of manufacture.

## STORAGE:

**PRE-LEDGER AND LEDGER FLASHING TAPE** should be stored in the original, unopened container at ambient temperatures between 40°F to 90°F (5°C to 32°C). Storage area should remain dry and out of direct sunlight. Do not remove materials from original containers until ready for use. Do not double stack pallets.

## CLEAN UP:

Dispose of waste in accordance to local requirements. Control worksite so that boxes and release liner do not present a hazard. Packaging materials and release liner can be recycled.

## CAUTION:

**PRE-LEDGER AND LEDGER FLASHING TAPE** has an aggressive adhesive. Care should be taken when placing into initial position. Take off only as much release liner as is needed to get the initial placement started then remove remaining release liner while hand smoothing into place to prevent air bubbles and to prevent the tape from sticking to itself. Do not adhere **PRE-LEDGER AND LEDGER FLASHING TAPE** to skin, removal may cause loss of hair and/or bleeding. Protecto Wrap Company recommends the use of safety glasses and gloves. Protecto Wrap Company recommends the use of appropriate fall protection when working above ground level Do not stretch **PRE-LEDGER AND LEDGER FLASHING TAPE**.

## LIMITED WARRANTY:

This product is covered by the Protecto Wrap Standard 10 year Limited Warranty.

## TECHNICAL PROPERTIES

| PROPERTIES                            | TEST RESULTS                    |
|---------------------------------------|---------------------------------|
| Color                                 | Black                           |
| Thickness                             | 34 mils +/-1                    |
| Nail Sealability                      | Self Sealing                    |
| Installation Temperature              | 32°F/0°C to 120°F/48°C          |
| Cold Weather Installation With Primer | -10°F/-23.3°C to 120°F/48°C     |
| In-Service Temperature                | -45°F to 300°F (-42°C to 149°C) |



**Protecto Wrap Company**  
1955 S. Cherokee Street  
Denver, CO 80223  
(800) 759-9727  
[www.ProtectoWrap.com](http://www.ProtectoWrap.com)

