

UNIVERSAL PRIMER-FREE MEMBRANE

Air Barrier/Vapor Retarder/Thru-Wall Flashing

NEW!
INSTALL DOWN TO
-20°F (-28°C)
WITHOUT THE NEED
FOR A PRIMER



10 Year Limited Warranty

- Universal Primer-Free Membrane is a high performance selfadhering membrane with Super Stick Technology™ adhesive that can be used in a variety of building envelope applications including:
 - Full wall air & vapor barrier
- Thru wall flashing
- Below grade waterproofing
- Retaining wall waterproofing

- ICF

- Behind metal wall panels
- Behind cultured stone & brick veneer
- Class A Fire rating
- IAPMO ER #362
- Install down to -20°F all temp, all weather
- Lightweight roll 16# for 36" x 50'
- Can be installed on damp surfaces
- 180 day UV exposure
- No cold weather storage temperature requirements
- Excellent chemical compatibility
- Rated to 300°F
- No asphalt, VOC's, HFCC's or CFC's
- Meets or exceeds AMMA 711-13 requirements
- Seals around properly installed nails and staples



Saves time and money by eliminating the need for priming




UNIVERSAL PRIMER-FREE MEMBRANE

Air Barrier/Vapor Retarder/Thru-Wall Flashing

AVAILABLE SIZES

4", 6", 9", 12", 18", 24", 36", 48" x 50'

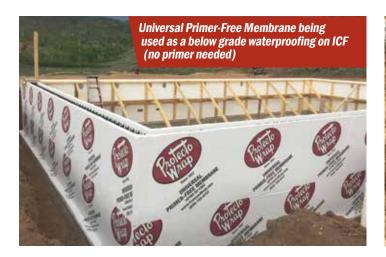







NOTE: For the most current information, refer to the Protecto Wrap website at www.protectowrap.com.

